


Top Signal Omni Cellular Cylinder Antenna 600-4000 MHz N-Female

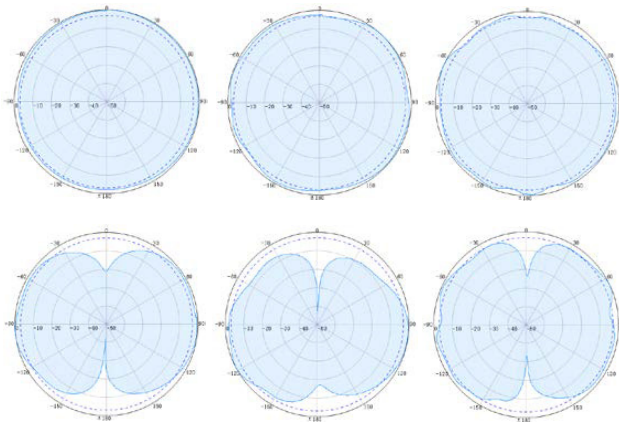

700-960MHz

1710-2700MHz

3300-3950MHz

Description

The Top Signal TS210471 Omni Cylinder Antenna works with 600-4000 MHz 5G, 4G LTE, and 3G frequencies. This antenna mounts upright on poles 1.5" – 2.0 inches in diameter with L-bracket and U-bolt included. This antenna works with all cell phone providers and is made from UV-resistant PVC intended for outside use.

PRODUCT No: TS210471
 Top Signal Omni Cellular Cylinder Antenna

Features:

2 to 4.5 dBi Gain

Outdoor

Omni Directional

N-female

Specifications:

Frequency Range	600-4000 MHz
Gain /VSWR	2 dBi (600-960 MHz) / ≤ 1.8
Gain /VSWR	4 dBi (1710-2700 MHz) / ≤ 1.8
Gain /VSWR	4.5 dBi (3300-4000 MHz) / ≤ 1.8
Vertical Beam	Horizontal Beam
80°	360° (600-960 MHz)
52°	360° (1710-2700 MHz)
38°	360° (3300-4000 MHz)
Operating Temp	-40°C to +65 °C
Input Impedance	50 ohm
Input Max Power	100 W
Lightning Protection	DC Ground
Antenna Connector	N-Female
Antenna Dimensions	9.8 in x 2.4 in diameter
Antenna Weight	2.2 lbs
Reflector Material	Aluminum
Radome Material	ABS (UV stabilized)
Mounting Pole	1.5 - 2.0 in poles
Color	White
Mounting Type	L-bracket/U-Bolt bracket (included)