

Top Signal High-Gain Omni Cellular Antenna 698-2700 MHz N-Female



PRODUCT No: TS210681
 Top Signal High-Gain Omni Antenna


Features:

- 4 to 6 dBi Gain
- Outdoor
- Omnidirectional
- N-female


Specifications:

Frequency Range	698-2700 MHz
Gain /VSWR	4 dBi (698-960 MHz) / ≤ 2.0
Gain /VSWR	6 dBi (1710-2700 MHz) / ≤ 2.1
Vertical Beam	Horizontal Beam
53°	360° (698-960 MHz)
25°	360° (1710-2700 MHz)
Polarization	Vertical
Input Impedance	50 ohm
Input Max Power	100 W
Lightning Protection	DC ground
Antenna Connector	N-female
Antenna Dimensions	63 x 750 mm, 2.4 x 29.5 inches
Antenna Weight	4.4 lbs, 2 kg
Reflector Material	Copper
Radome Material	UV-PVC
Rated Wind Velocity	130 mph, 210 km/h
Mounting Pole	1.5-2.0 inch poles
Color	White
Operating Temp	-40° C to +65° C
Mounting Type	U-bolts with bracket (included)

Horizontal

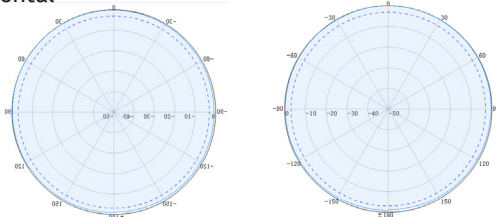

Vertical

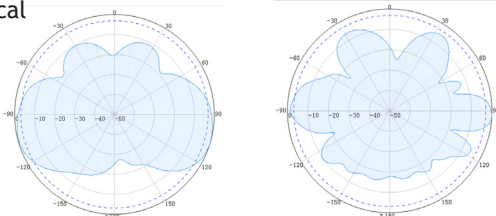

698-960MHz

1710-2700MHz