

eqo

SKU: 473120 MAP: \$349.99

FEATURES

- Boosts 4G LTE & 3G signals for a desktop workspace area up to 1 small room at home, office, or apartment
- Coverage area up to 1,500 sq. ft.
- For multiple devices and users
- Works on ALL phones with ALL carriers simultaneously
- Plug-n-Play, 5 minutes east install



- LTE FASTEST NETWORK SPEEDS
- UP TO 1,500 sq. ft. COVERAGE
- UP TO +70 dB GAIN
- MULTI-USER WIRELESS BOOSTER

About

The **eqo** is weBoost's easiest installed cell phone signal booster to date and brings up to 32x stronger signal into a home, condo, or apartment in just seconds. Installation takes just a few minutes, allowing you to begin boosting indoor signal coverage up to 1,500 sq. ft. with no outside antenna almost immediately. The eqo cell phone signal booster works with all U.S. and Canadian wireless carriers.

Most importantly, the eqo can support multiple users and multiple devices on every network simultaneously. weBoost's eqo comes with a 2-year warranty meaning it works or your money back.

Kit Includes



eqo Booster



eqo Inside Antenna



Power Supply (859948)



25' Cable (951156)


Coverage Area

IF YOU HAVE	YOU MAY RECEIVE
●●●●● -89 AND LOWER Stronger 5-Bar Outside Signal	UP TO 1,500 sq. ft. boosted indoor signal
●●●●○ -90 dB Stronger 3 to 4-Bar Outside Signal	UP TO 750 sq. ft. boosted indoor signal
●●○○○ -100 dB Stronger 3 to 4-Bar Outside Signal	Boosted indoor signal a few steps from the antenna
○○○○○ No existing Outside Signal	A signal booster likely will not work

Specifications

MODEL NUMBER	473120	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 2	1900 MHz
MAX GAIN	70 dB	
IMPEDANCE	50 Ohm	
POWER	5V/2.5A	
CONNECTORS	SMA Female	
DIMENSIONS	3.75 x 9 x 9.75 in	
WEIGHT	2.405 lbs	

Installation

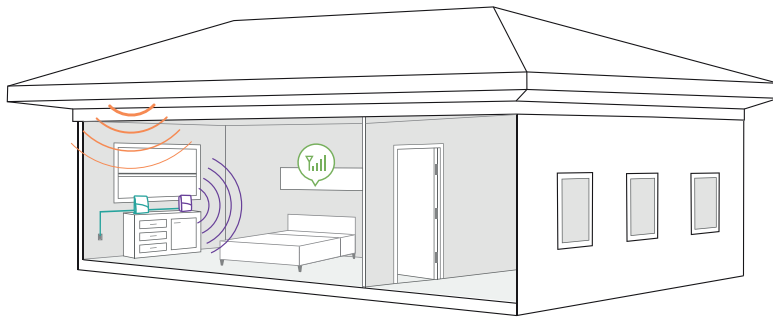

- 1 Receives signal:** The powerful antenna reaches out to access a voice and 3G, 4G, and LTE data signal, and delivers it to the booster.
- 2 Boost signal:** The booster receives the signal, amplifies it, and serves as a relay between your phone and the nearest cell tower.
- 3 Broadcasts signal:** Your devices get a stronger signal, and calls and data are fed through the booster back to the network.

Available Accessories

Optional Antenna Kits



Panel Antenna,
50 Ohm
(314453)



Directional Antenna,
50 Ohm
(314411)



20' RG58 Cable
(314411)

Support



2 Year Warranty from Purchase.

UPC

