

OFFICE 200 DIRECTIONAL/PANEL

SKU: 50 Ohm: 475047 MAP: \$1,699.99

FEATURES

- Ideal amplifier system for small-to-medium businesses
- Covers up to 10,000 square feet
- Comes with LCD touch screen for increased usability
- Allows manual control of frequency bands
- Is FCC approved and works on all U.S. carrier networks, including Verizon, AT&T, T-Mobile, UScellular, and more



KIT INCLUDES

475047 50 Ohm Directional/Panel Kit	Office 200 Booster	Outside Directional Antenna 314411	Inside Panel Antenna 311234	Lightning Surge Protector 859902	2ft Low-Loss Wilson400 Cable 952302	60ft Low-Loss Wilson400 Cable 952360	75ft Low-Loss Wilson400 Cable 952375
---	-----------------------	--	-----------------------------------	--	---	--	--

ABOUT

weBoost **Office 200 (Directional/Panel)** kit is our most powerful booster for small businesses or warehouses in rural areas. Target the nearest tower with the included outside directional antenna to powerfully boost coverage. Once securely mounted to a wall, the inside panel antenna broadcasts the amplified signal in a wide area. The 5G-compatible, 50-ohm-kit immediately improves coverage on all U.S. carrier networks, including Verizon, AT&T, T-Mobile, UScellular, and more. With XDR technology, the booster will never shutdown and continually optimize signal. All components needed for do-it-yourself installation are included. The Office 200 comes with an industry-leading 3-year manufacturer's warranty and a 30-day money-back guarantee.


This kit is only available at 50 ohms.

SPECIFICATIONS

SKU NUMBER	475047†	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	72 dB	
IMPEDANCE	50 Ohm	
POWER	110-240V AC, 50-60 Hz, 20 W	
CONNECTORS	N-Female	
BOOSTER DIMENSIONS	14.25 × 10.75 × 2.25 in	
BOOSTER WEIGHT	7.7 lbs	

† **WARNING:** This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

HOW IT WORKS

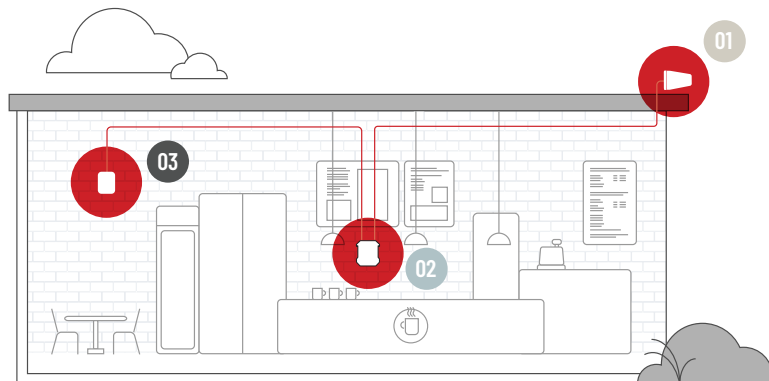

- 01 Outside antenna:** The outside antenna communicates back and forth with nearby cell towers.
- 02 Booster:** The booster amplifies any cell signals it receives from the outside antenna.
- 03 Inside antenna:** The inside antenna broadcasts these signals for use throughout your business.

PACKAGE DIMENSIONS

13.125 L x 19.125 W x 13.625 H

13.125 in.
x
13.625 in.

FRONT

19.125 in.
x
13.625 in.

SIDE

13.125 in.
x
19.125 in.

TOP/BOTTOM



WEIGHT

MASTER CARTON: 13.125 L x 19.125 W x 13.625 H | 21.6 lbs. | Qty 1


SUPPORT



3-Year Warranty from Purchase.

Website: <http://support.weboost.com>

Phone: +1 866 294 1660
Monday to Saturday



FOR PARTNER'S USE

UPC

