



Vehicle Booster HiBoost Travel 4G LTE C27G-5S

Overview

HiBoost Travel 4G LTE (C27G-5S) is a 50dB, ultra wide band cell phone signal booster that provides a complete solution for all vehicles. Improve 2G, 3G and 4G cell phone signal strength, both voice and data especially in poor signal areas. With standardized industrial level design, strict testing and competitively priced, the Travel 4G LTE provides a superior communication experience with clearer calls and faster data speeds than ever before.



FCC and IC fulfillment

- FCC Grant Code OWW and IC Grant Code 10527A for this series product. To get detail information, go to <https://apps.fcc.gov/oetcf/eas/reports/GenericSearch.cfm> <http://www.ic.gc.ca/app/sitt/reletel/srch/nwRdSrch.do?lang=eng>
- FCC and IC approved this equipment for use with all US & Canadian carriers
- The FCC ID for this equipment is OWWC27G-CPAL-AB-C
The IC ID for this equipment is 10527A-F15G5SIC



Key Features

- Support all 2G, 3G and 4G bands
- Streamline design
- Quality metal construction, strong and durable
- Good heat dissipation for longevity
- Low interference to cell tower
- Multiple users are supported
- 3 years warranty
- FCC and IC certified



Booster Kit Includes


- Travel 4G LTE cell phone booster
- 5dB magnetic antenna mounting on roof of vehicle
- Patch antenna used for interior of vehicle
- DC power adapter with 6' cable

Address: 6210 N. Belt Line Road, Suite 110, Irving, TX 75063 Phone: (972)870-5666 E-mail: info@huaptecus.com
Website: www.huaptecus.com

Specification

Electrical specification	
UL Frequency Range	698-716 / 776 – 787 / 824-849 / 1850-1910 / 1710-1755
DL Frequency Range	728-746 / 746 – 757 / 869-894 / 1930-1990 / 2110-2155
Supported Standards	CDMA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all cellular standards
Max .Gain	50dB
Automatic Gain Control	31dB
I/O Port	SMA-Female
Impedance	50 ohm
Environment Conditions	IP40
Dimensions	4.7*7.8*1.4inch / 120*198*34mm
Weight	≤5.5Lbs/2.5Kg
Power Supply	DC12V / 3A

Installation Example

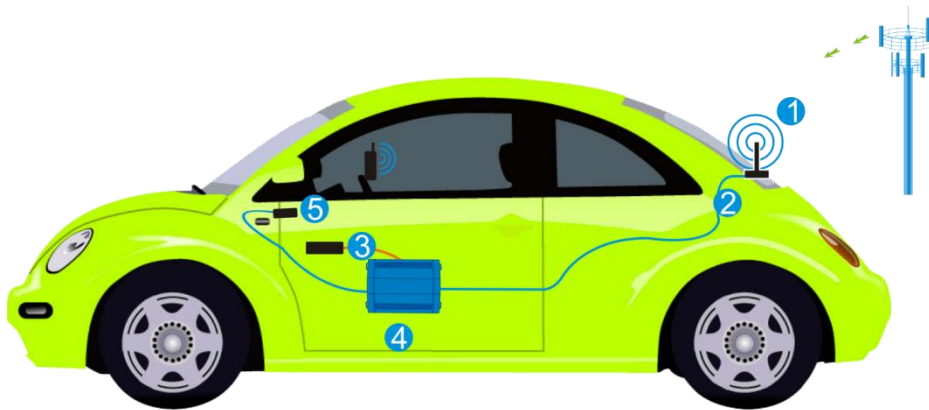

1. Magnetic Antenna 2. Cable 3. 12V Car Lighter Power Supply
4. Car Booster 5. Server Antenna