


ANTENNAS | XPOL-1- 5G+ SERIES

X-POLARISED, OMNI-DIRECTIONAL, 2x2 MIMO 5G ANTENNA

410 – 6000 MHz, 6 dBi



 410 – 470 MHz 617 – 960 MHz 1427 – 1517 MHz 1710 – 2700 MHz 3300 – 4200 MHz 4400 – 6000 MHz	 6 dBi	 Increase X Mb/s	 Omni- Directional	 4G LTE	 5G
 BAND 71	 3.5 GHz CBRS	 -40°C to +80°C	 Fire Resistant	 2x2 MIMO	 IP 65

Urban

Commercial &
Industrial

- Ultra-Wideband cellular antennas from 410 to 6000 MHz
- Cross-polarised antennas for improved performance
- Omni-directional antenna with a low-profile design
- High gain for the antenna size
- 2x2 MIMO 4G/5G antenna for higher data throughputs
- Versatile mounting options for ease of installation
- Weather, dust, and vandal-resistant enclosure (IP 65)

Product Overview

The XPOL-1-5G+ is Poynting's third generation "V3" of this very popular Cross Polarised (XPOL), cellular band, 2x2 or 4x4 MIMO antenna. The antenna has been completely redesigned from previous generations, featuring an all-new enclosure and high-performing antenna design. The XPOL-1-5G+ is now ultra-wideband, covering a broad frequency range from 410 to 6000 MHz. This allows it to be utilized across different cellular operators and technologies, and it is ready for future cellular technologies up to 6GHz for 5G applications. The 2x2 MIMO antenna option offers a 2-in-1 solution that includes two cross-polarized cellular antennas. Under most conditions, these cross-polarized antennas can potentially double your data rates.

The XPOL-1-5G+ antenna delivers exceptional performance with a peak gain of 6 dBi, nearly double the peak gain of the previous version (V2). This improvement enables superior signal strength and extended coverage in Fixed Wireless Access (FWA) deployments. The radiation patterns of this antenna are omni-directional and exceptionally well controlled, further enhancing its performance. This makes the antenna perfect for various application areas, such as urban, suburban, and commercial, to achieve the best possible coverage over a large area. The robust mechanical enclosure design makes the antenna weather, dust, and vandal resistant, granting it an IP65 rating, suitable for outdoor environments.

Features

- Ultra-wideband coverage from 410 to 6000 MHz
- X-Polarised 2x2 MIMO Antenna
- Wall, Pole, or Window mountable
- Low-profile and rugged mechanical design with an IP65 rating
- High pattern consistency across bands for 4G/5G carrier aggregation


Application Areas

- Outdoor antenna for Fixed Wireless Access (FWA)
- Homes and small offices in both urban and suburban environments
- Small to medium-sized businesses across various commercial and industrial sectors such as retail outlets, petrol stations, guesthouses, banks, etc.
- Temporary offices on construction sites
- Serve as a reliable backup connectivity option for locations that use fibre or Starlink as their primary internet connection



Frequency Bands

The XPOL-1-5G+ is an 5G antenna that works from | 410 – 470 MHz | 617 – 960 MHz | 1427 – 1517 MHz | 1710 – 2700 MHz | 3300 – 4200 MHz | and | 4400 – 6000 MHz |

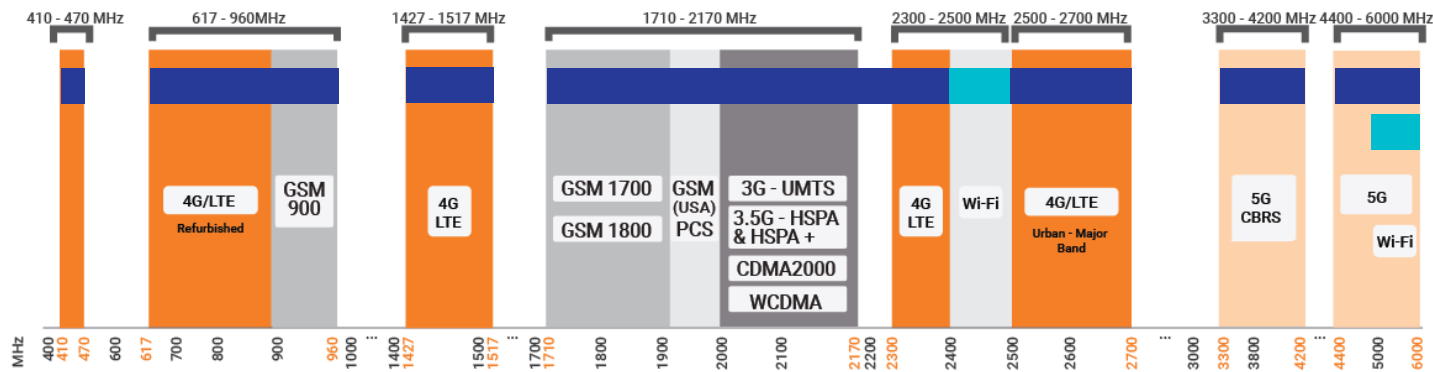

Indicates the 5G/LTE bands on which XPOL-1-5G+ works

Indicates the WI-FI bands on which XPOL-1-5G+ works

Antenna Overview

	5G LTE
Number of Ports	2
SISO / MIMO	2x2 MIMO
Frequency Bands	410 – 6000 MHz
Polarisation	Cross Polarised
Peak Gain	6 dBi
Coax Cable Type	HDF 195
Coax Cable Length	5m
Connector Type	SMA (M)

*The coax cables & connectors are factory mounted to the antenna

Electrical Specifications

Frequency Bands:	410 – 470 MHz 617 – 960 MHz 1427 – 1517 MHz 1710 – 2700 MHz 3300 – 4200 MHz 4400 – 6000 MHz
Gain (Max):	-4 dBi @ 410 – 470 MHz 2 dBi @ 617 – 960 MHz 2.5 dBi @ 1427 – 1517 MHz 5 dBi @ 1710 – 2700 MHz 6 dBi @ 3300 – 4200 MHz 5.5 dBi @ 4400 – 6000 MHz
VSWR:	≤2:1 across 90% of the bands
Feed Power Handling:	10 W
Input Impedance:	50 Ohm (nominal)
Polarisation:	Cross Polarised
Coax Cable Loss:	0.385 dB/m @ 900 MHz 0.507 dB/m @ 1500 MHz 0.565 dB/m @ 1800 MHz 0.788 dB/m @ 3000 MHz
DC Short:	Yes, path to ground

Product Box Contents

Antenna:	A-XPOL-0001-V3-21
Mounting Bracket:	Pole/Wall mounting bracket and window suction cups included

Ordering Information

Commercial Name:	XPOL-1-5G+
Order Product Code:	A-XPOL-0001-V3-21
EAN Number:	6009710929216

Mechanical Specifications

Product Dimensions	246 mm x 157 mm x 88 mm (including bracket)
Packaged Dimensions:	271 mm x 191 mm x 120 mm
Weight:	0.7 Kg
Packaged Weight:	1.05 Kg
Radome Material:	UV Stable ASA
Radome Colour:	Brilliant White Pantone P 179-1 C
Mounting Type:	Wall, pole, and window mount


Environmental Specifications, Certification & Approvals

Wind Survival:	≤250 km/h *Except for window mount configuration
Temperature Range (Operating):	-40°C to +80°C
Environmental Conditions:	Outdoor/Indoor
Water Ingress Protection Ratio/Standard:	IP 65
Salt Spray:	MIL-STD 810G/ASTM B117
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non-condensing
Storage Temperature:	-40°C to +80°C
Enclosure Flammability Rating:	UL 94-HB
Impact Resistance:	IK 10
Product Safety & Environmental:	Complies with CE and RoHS standards



Antenna Performance Plots

VSWR

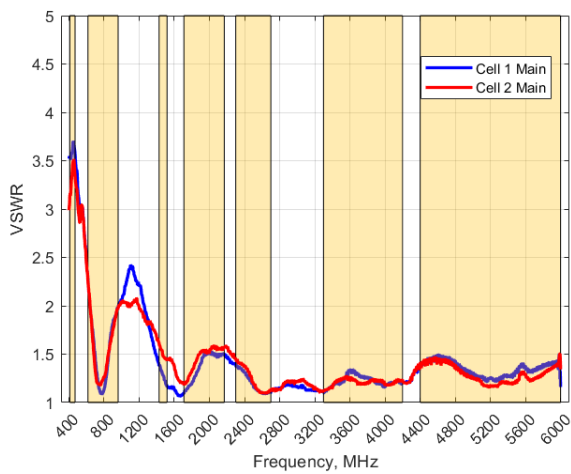


Voltage Standing Wave Ratio (VSWR)*

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The XPOL-1-5G+ delivers superior performance across all bands with a VSWR of $\leq 2:1$ across 90% of the bands.

*VSWR measured with a 5m low loss cable.


ISOLATION

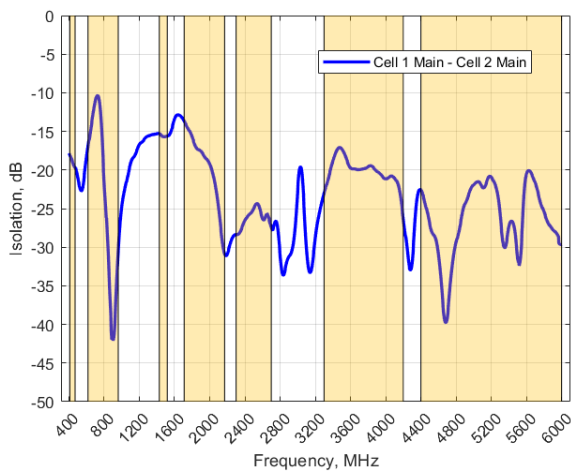

Isolation

Isolation is a measure of how much energy from one port leaks into another port undesirably. Isolation of 0 dB between 2 ports means that there is no isolation and the energy from 1 port excitation is visible on another port. Isolation of -30 dB or more means that $<0.1\%$ of 1 port's energy is leaked into another. A good isolation is under -10 dB.

GAIN (EXCLUDING CABLE LOSS)

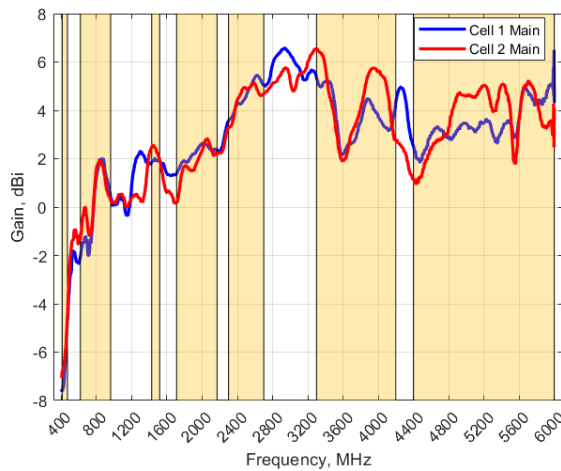

Gain* in dBi


6 dBi is the peak gain across all bands from 410 – 6000 MHz

Gain @ 410 – 470 MHz:	-4 dBi
Gain @ 617 – 960 MHz:	2 dBi
Gain @ 1427 – 1517 MHz:	2.5 dBi
Gain @ 1710 – 2700 MHz:	5 dBi
Gain @ 3300 – 4200 MHz:	6 dBi
Gain @ 4400 – 6000 MHz:	5.5 dBi


*Antenna gain measured with polarisation aligned standard antenna

Radiation Patterns – Cell 1 Main


Azimuth: 410 – 470 MHz

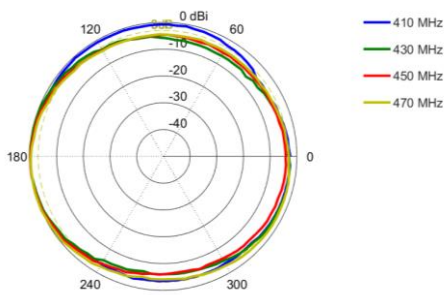


Elevation: 410 – 470 MHz

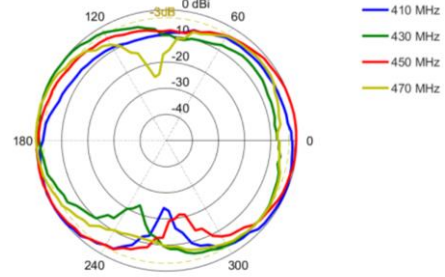


Azimuth: 617 – 960 MHz

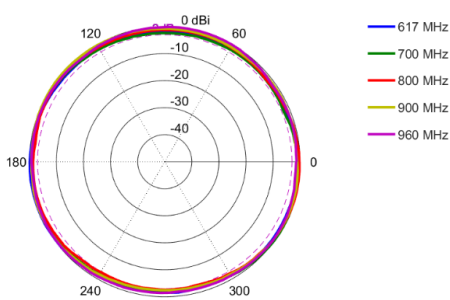


Elevation: 617 – 960 MHz

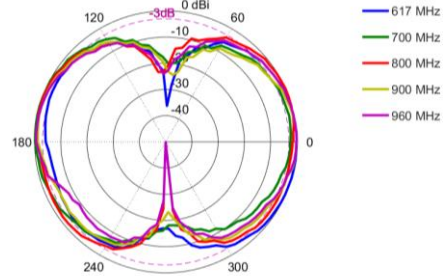


Azimuth: 1427 – 1517 MHz

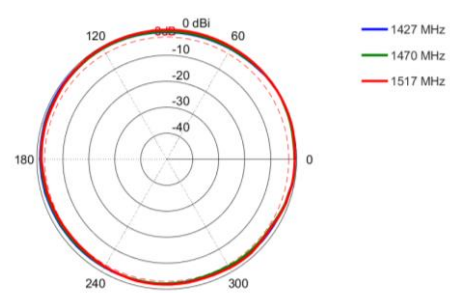


Elevation: 1427 – 1517 MHz

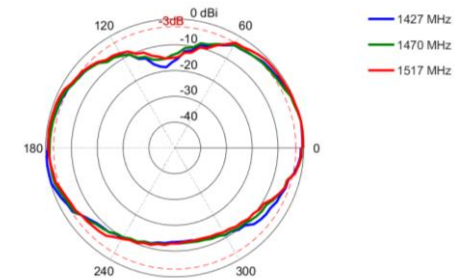


Azimuth: 1710 – 2170 MHz

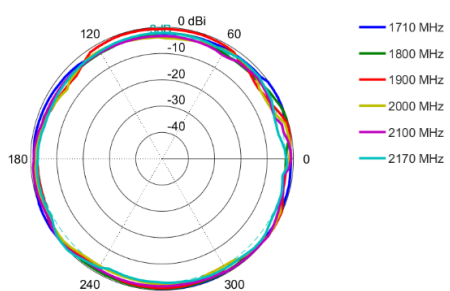


Elevation: 1710 – 2170 MHz

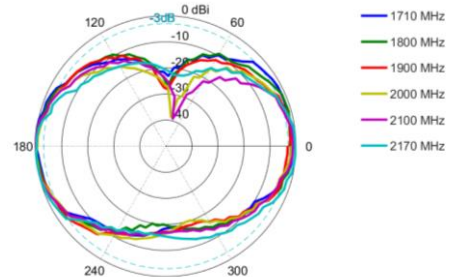


Azimuth: 2300 – 2700 MHz

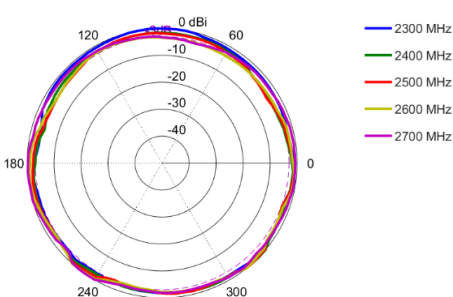


Elevation: 2300 – 2700 MHz

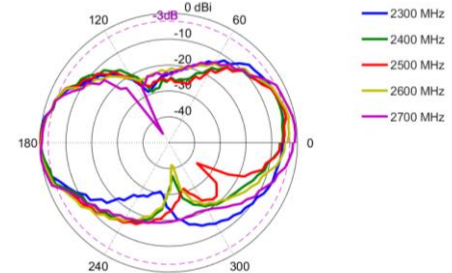


Azimuth: 3300 – 3800 MHz

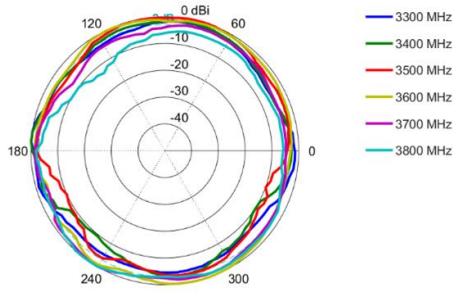


Elevation: 3300 – 3800 MHz

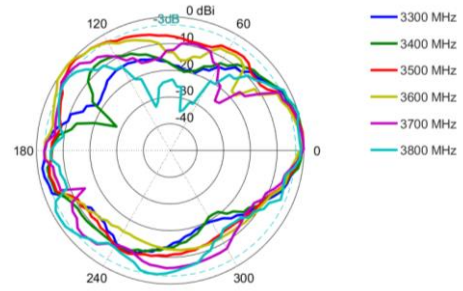


Azimuth: 3900 – 4200 MHz

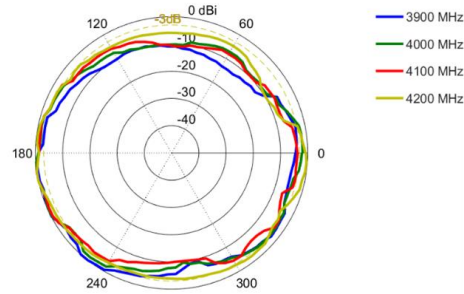


Elevation: 3900 – 4200 MHz

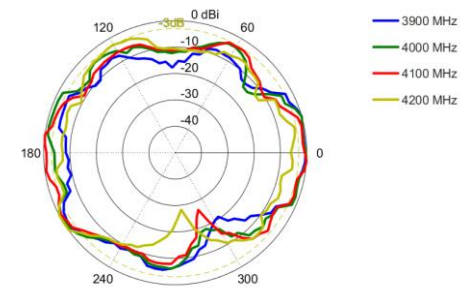


Azimuth: 4400 – 5000 MHz

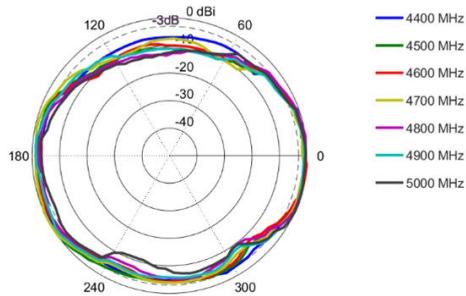


Elevation: 4400 – 5000 MHz

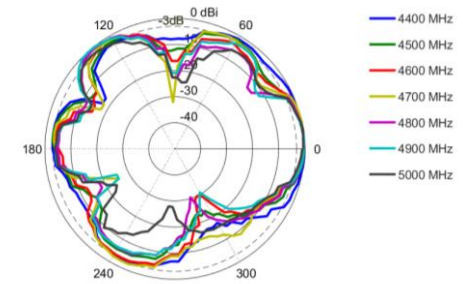

Azimuth: 5000 – 6000 MHz

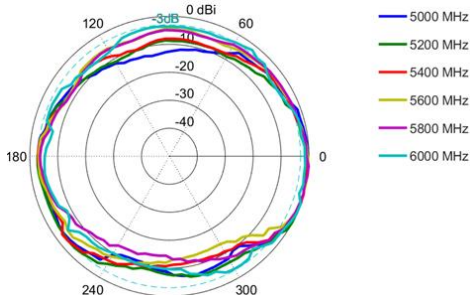


Elevation: 5000 – 6000 MHz

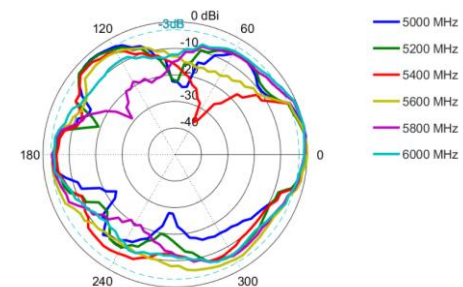


Radiation Patterns – Cell 2 Main


Azimuth: 410 – 470 MHz

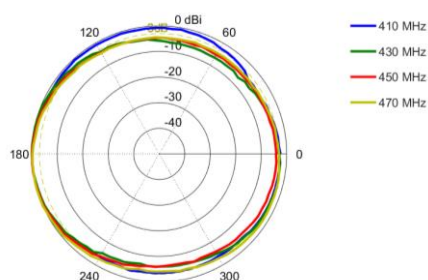


Elevation: 410 – 470 MHz

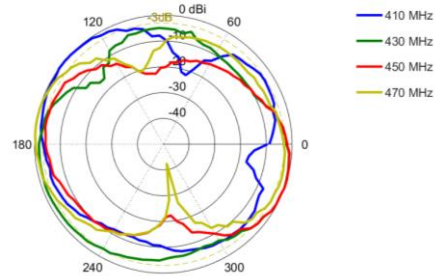


Azimuth: 617 – 960 MHz

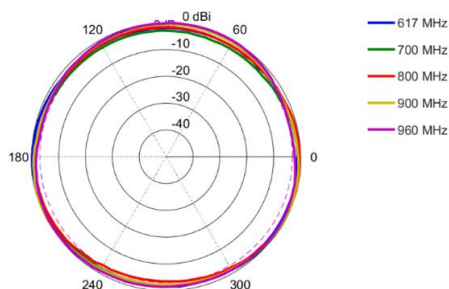


Elevation: 617 – 960 MHz

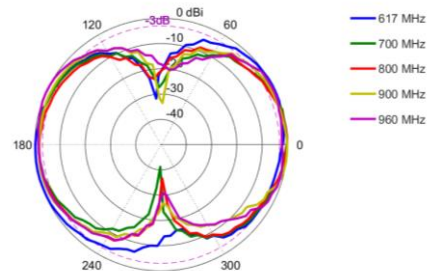


Azimuth: 1427 – 1517 MHz

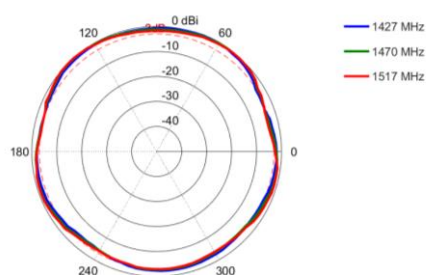


Elevation: 1427 – 1517 MHz

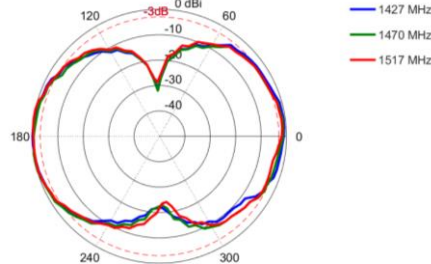


Azimuth: 1710 – 2170 MHz

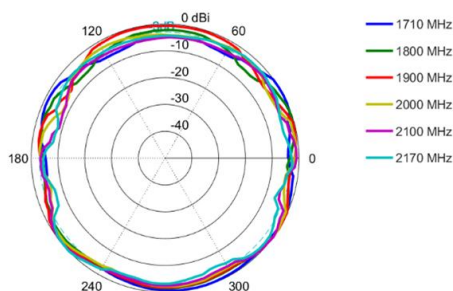


Elevation: 1710 – 2170 MHz

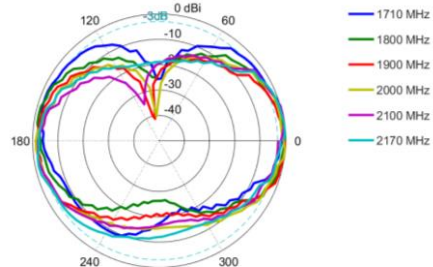


Azimuth: 2300 – 2700 MHz

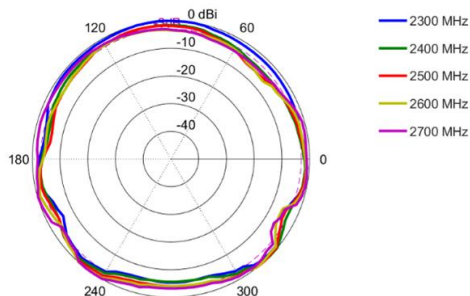


Elevation: 2300 – 2700 MHz

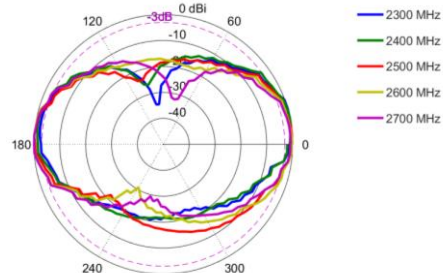


Azimuth: 3300 – 3800 MHz

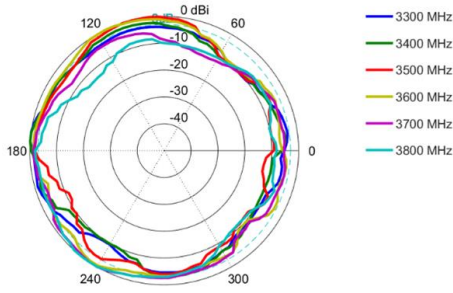


Elevation: 3300 – 3800 MHz

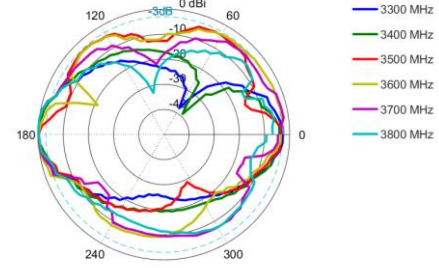


Azimuth: 3900 – 4200 MHz

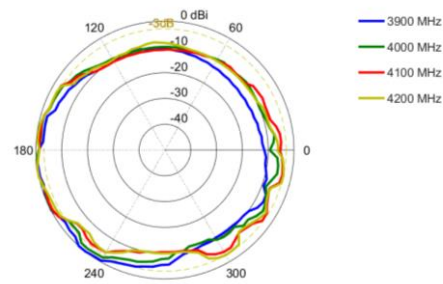


Elevation: 3900 – 4200 MHz

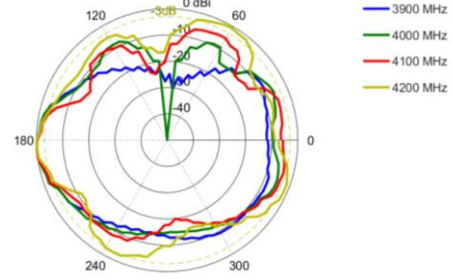


Azimuth: 4400 – 5000 MHz

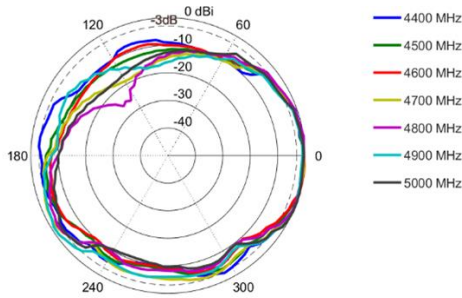


Elevation: 4400 – 5000 MHz

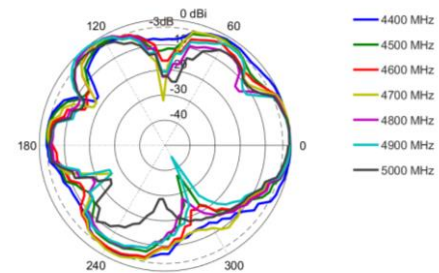

Azimuth: 5000 – 6000 MHz

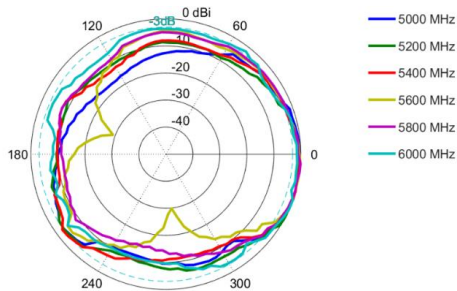


Elevation: 5000 – 6000 MHz

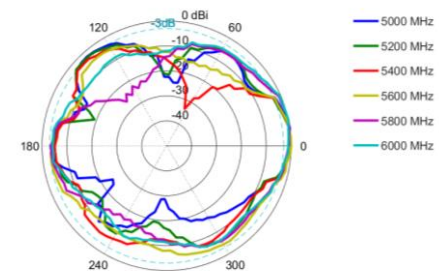


Combined Radiation Patterns – Cell 1 and Cell 2 Main


Azimuth: 410 – 470 MHz

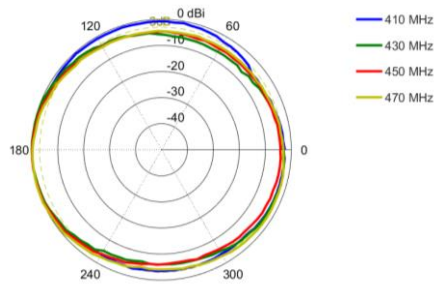


Elevation: 410 – 470 MHz

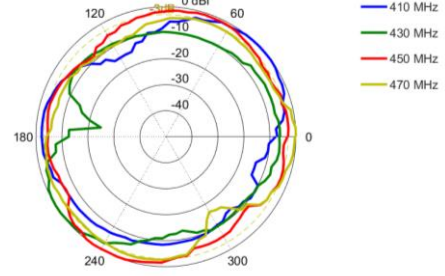


Azimuth: 617 – 960 MHz

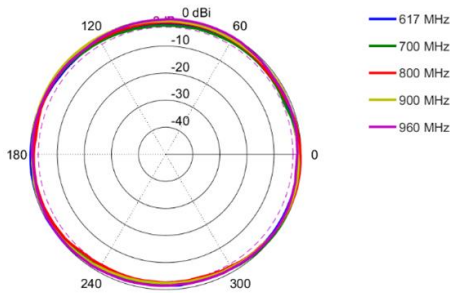


Elevation: 617 – 960 MHz

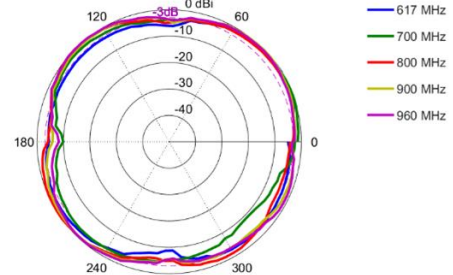


Azimuth: 1427 – 1517 MHz

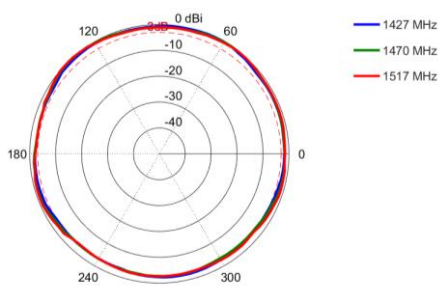


Elevation: 1427 – 1517 MHz

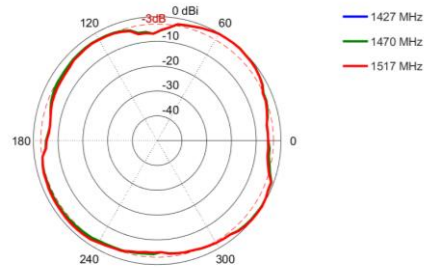


Azimuth: 1710 – 2170 MHz

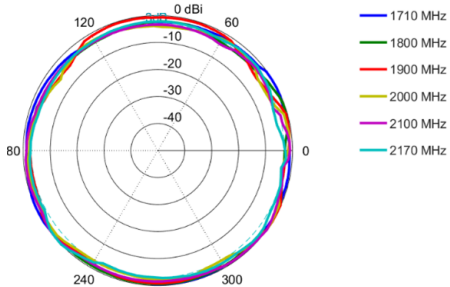


Elevation: 1710 – 2170 MHz

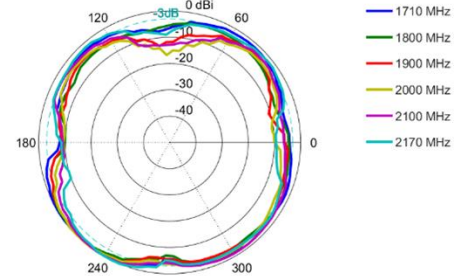


Azimuth: 2300 – 2700 MHz

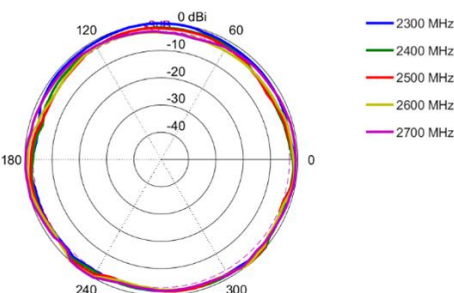


Elevation: 2300 – 2700 MHz

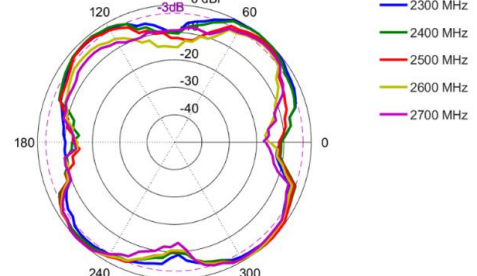


Azimuth: 3300 – 3800 MHz

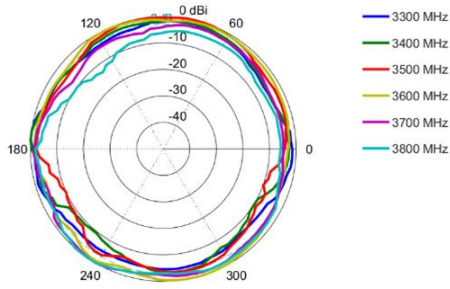


Elevation: 3300 – 3800 MHz

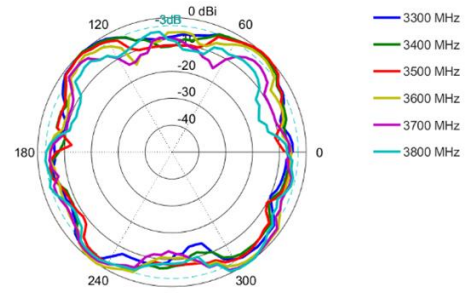


Azimuth: 3900 – 4200 MHz

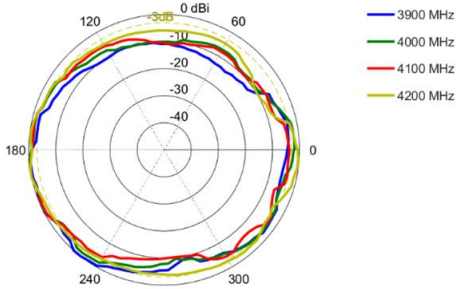


Elevation: 3900 – 4200 MHz

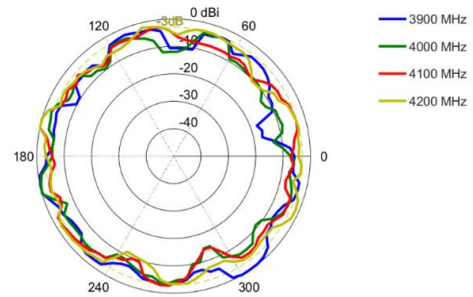


Azimuth: 4400 – 5000 MHz

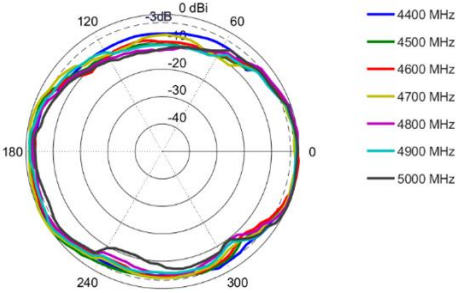


Elevation: 4400 – 5000 MHz

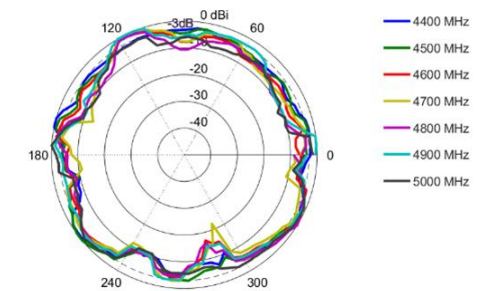

Azimuth: 5000 – 6000 MHz

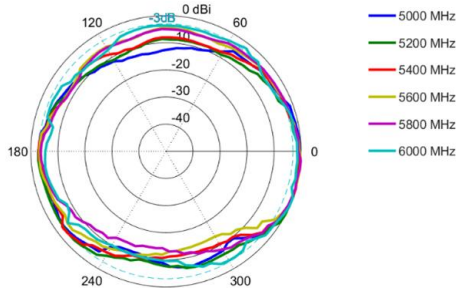


Elevation: 5000 – 6000 MHz

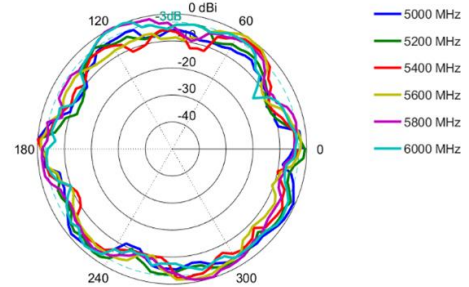

*Combined Patterns are for MIMO operation illustration

Technical Drawings

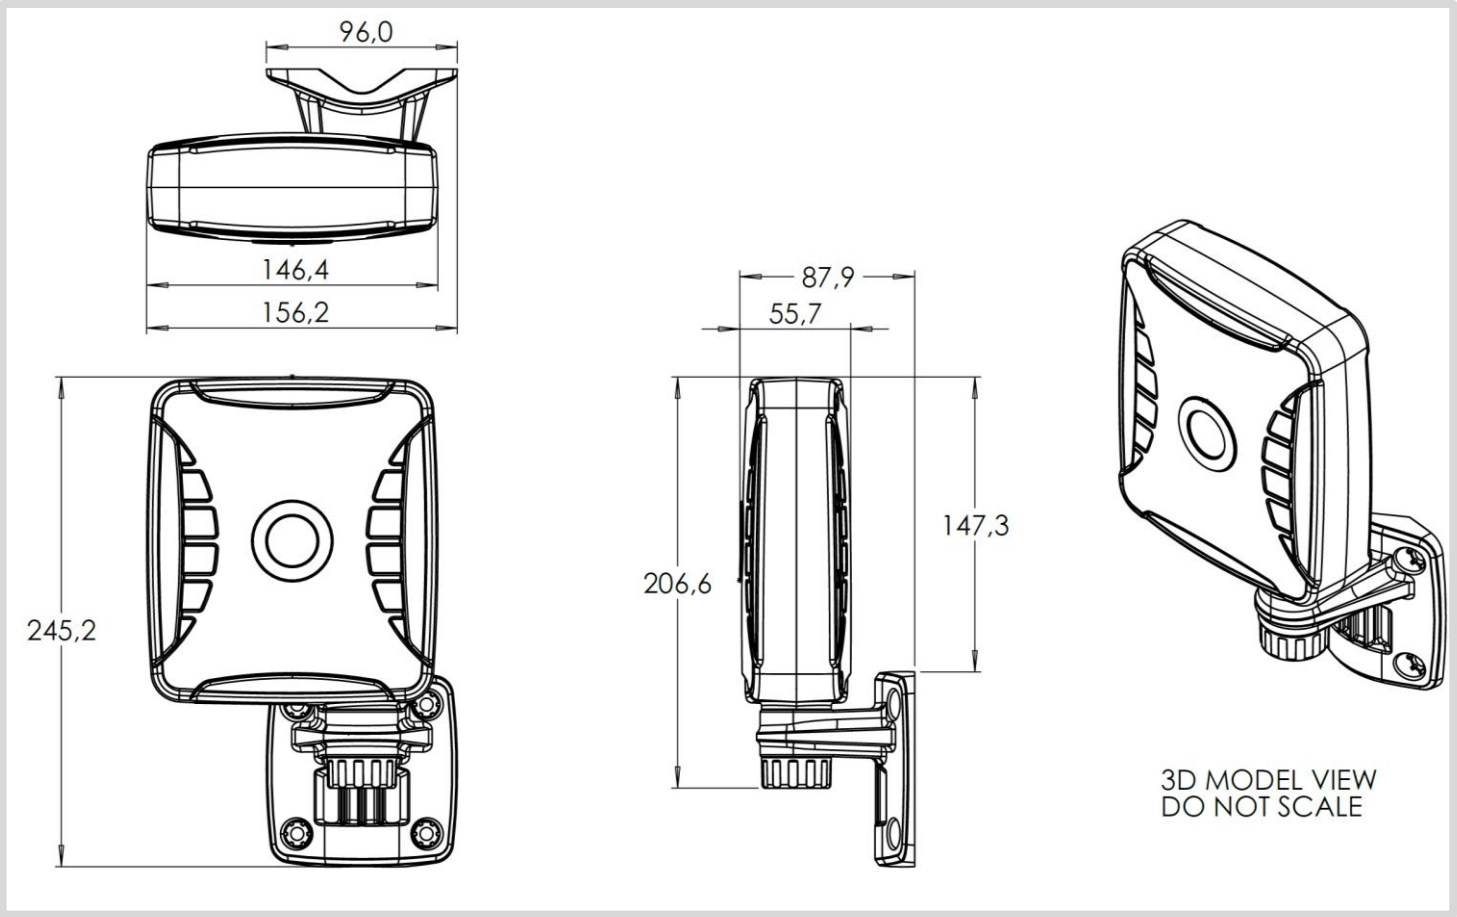

Mounting Options



Pole Mount

Pole mounting using the provided bracket and pipe clamp



Wall Mount

Wall mounting using provided bracket and knock-in screws



Window Mount

Window mounting using the provided suction cups

Additional Accessories

Extension Cables: Up to 10m HDF 195
Various connectors available
Installation poles and brackets available

See accessories technical specifications on www.poynting.tech

CONTACT POYNTING

Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park,
Landmarks Avenue,
Samrand, 0157, South Africa

Phone: +27 (0) 12 657 0050

E-mail: info@poynting.tech

International Email: sales-global@poynting.tech

Poynting Europe

Regus Business Center Neue Messe Riem
Kronstadter Straße 4
81677 München
Germany

Phone: +49 89 7453 9002

E-mail: sales-europe@poynting.tech

Poynting USA

1804 Owen Court, Suite 104,
Mansfield,
TX 76063
USA

Phone: +1 817 533-8130

E-mail: sales-us@poynting.tech