


## Top Signal 5G OTR Antenna 600–4000 MHz SMA-Female

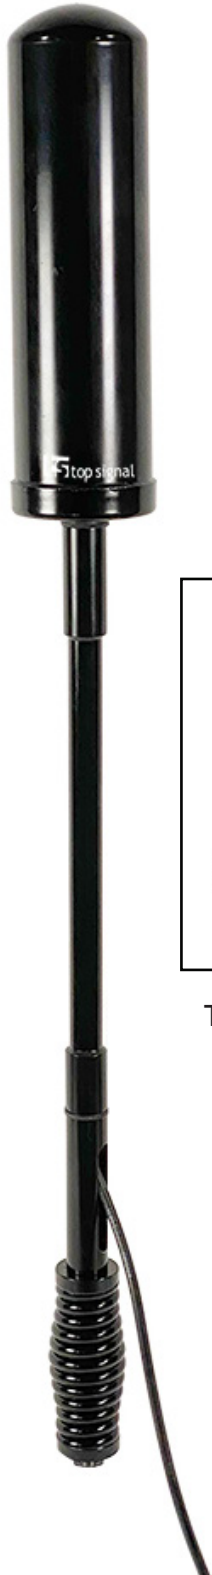

### Top Signal 5G OTR Antenna

#### Package Contents:

- Top Signal 5G OTR antenna
- 11.3' RG58 cable (attached)
- 11.1" mast extension
- 2.8" cable side exit adapter
- 3.7" spring mount
- L-bracket 3-way mount
- Hex nut and lock washer
- SMA-male barrel adapter

**PRODUCT No: TS210401**

5G Omni OTR Antenna | Top Signal Series

#### Features:

- 2.3 to 4.1 dBi Gain
- Outdoor Vehicle Antenna
- Omnidirectional
- SMA-Female Connector / SMA-Male adapter included
- 5G frequency range 600-4000 MHz
- 11.3 ft. of flexible RG58 coax cable
- 3-way L-bracket mount (included)

#### Specifications:

Frequency Range	600-4000 MHz
Gain	3.3 dBi (600-798 MHz)
Gain	3.2 dBi (806-960 MHz)
Gain	4.1 dBi (1710-1880 MHz)
Gain	3.9 dBi (1990-2170 MHz)
Gain	3.4 dBi (2300-2700 MHz)
Gain	2.3 dBi (3300-4000 MHz)
Input Impedance	50 Ohm
Antenna Type	Outside omnidirectional
Mount Spec	3/8-in. x 24 thread
Mount Type	CB or 3-way mount
Antenna Connector	SMA-female
Antenna Length	11.5 to 26.3 in.
Polarization	Vertical
Antenna Weight	2.5 lbs
Spring Material	Black Chrome
RG58 Cable Color	Black
Cable Length	11.3 ft. (3.44 m)