

## Top Signal Broadband Omni 700-2700MHz 3dB Antenna




Includes hardware that allows it to be mounted three different ways.

1. Mount on a pole using the included L-bracket and U-bolt hardware.
2. Mount on an interior or exterior wall with the included L-bracket.
3. Mount inside on a commercial dropped ceiling tile or sheetrock with included hardware.

The antenna has an N-Female connector at the base to be connected to conventional building 400 coax with N-Male connectors.

### Installation Sketch:

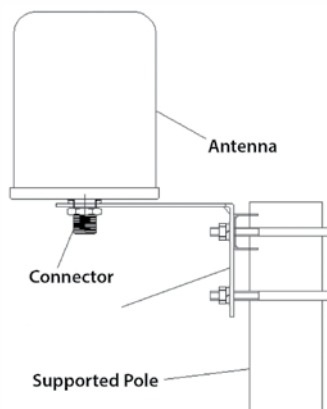

**PRODUCT No:**  
TS210371 Top Signal Omni Antenna

### Features:

- 3dB
- Indoor/Outdoor Omni
- White ABS dome material
- Pole mounting hardware
- Omni-Directional
- 3-Way mounting system

### Application:

- Verizon LTE 4G
- 750 MHz WiMax Upper Band
- 700 MHz Public Safety Applications
- Cellular 800 and PCS 1900
- 1700/2100 AWS

### Specifications:

Category	Antenna
Model	TS413001
Freq.Range-MHz	698-896 / 1700-2700 MHz
Gain-dBi	698-896 MHz - 3dB 1700-2700 MHz - 3.5dB
Horizontal Beam	360°
Vertical Beam	55-60°
Color	White
VSWR	<1.5
Impedance	50 ohm
Input Max Power	100 W
Polarization	Vertical
Connector	N-Female
Size	3.93 x 5.12 in 100 x 130 mm
Antenna Weight	0.27 kg