


RV weBoost Drive Reach Class A & Class C Motorhome+Car 2-in-1 Cell Signal Booster 470154-PK Installation Guide


You can install the RV weBoost Drive Reach system yourself or you can have it installed by an RV dealer or service center. Installation requires running a coax cable into your RV through an available opening or a specially drilled 0.35-inch (9 mm) entry point. (Speak with a professional if you're not sure how to run cable into your rig.)

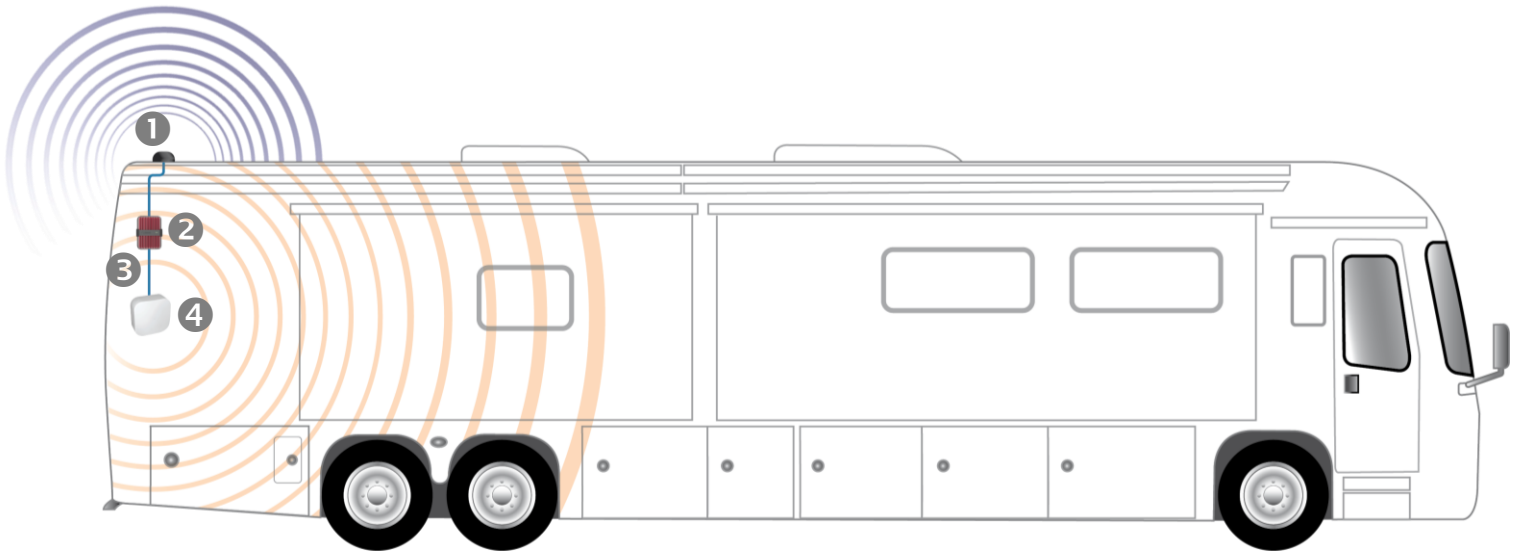

There are **four main components** to install in your motorhome:

1 **Outside Poynting PUCK-1 antenna with 6.6' coax cable.**

Attach the antenna to the roof of your motorhome with the 3M[®] adhesive pad, the pole-mount bracket, the magnetic base, or a spigot. (See the PUCK-1 user guide for installation instructions.)

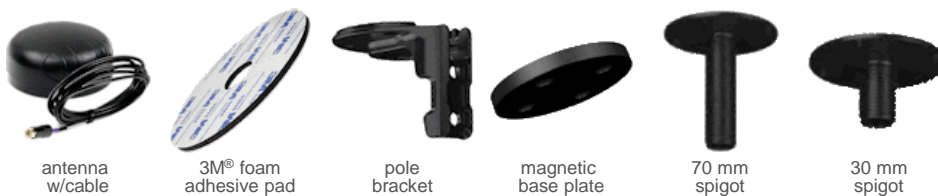

We recommend mounting the PUCK-1 antenna at the very front or very back of your rig and pointing the inside antenna away from the PUCK-1 antenna. (This prevents signal oscillation and reduced booster output.)

Insert the connector at the end of the cable into a 0.35-inch (9 mm) hole or other opening and pull the cable into the RV to the booster. Connect the end of the cable to the **OUTSIDE ANTENNA** port on the booster.

Do not pinch, kink, loop, or coil the cable.

Installation tip:

We strongly recommend that you do a "soft installation" before permanently mounting the PUCK-1 antenna and pulling cable.

Drive to an area with weak cell signal, then lay out and connect all the components inside your RV. Power up the booster and check the signal you receive from the inside antenna. Compare your internet data speeds with the booster off and the booster on.

Continued on the back side...

v.20220920

2 weBoost Drive Reach signal booster

The booster needs to be placed where it has access to a 120-volt AC power outlet.

Use the AC adapter (850015) to power the booster in your motorhome; use the DC power supply (850029) in your personal vehicle.

A hardwire power supply (950079) can connect the booster directly to a 12-volt battery. This optional power supply is available at PowerfulSignal.com.



3 Inside coax cable

This system includes a 10-foot length of flexible 195 coax cable. Connect one end of the cable to the booster's INSIDE ANTENNA port. Connect the other end to the panel antenna.

Do not pinch, kink, loop, or coil the cable.



4 Inside directional panel antenna.

This antenna broadcasts in the direction its front face is pointed.

It stands upright on any flat surface and can be moved to where you need cell signal most inside your RV.

You can also mount it to walls or ceilings with the included bracket and hardware or with Command® Strips or similar adhesives.



Usage tip:

The closer your cell phone or cellular hotspot, router, or modem is to the inside antenna, the more signal it will receive.

This is particularly important in areas where outside signal is especially weak, when the broadcast area from the inside antenna may be limited to a few feet.